



**D F S H TYPE** (外徑20,導程40)

◀ 超高導程

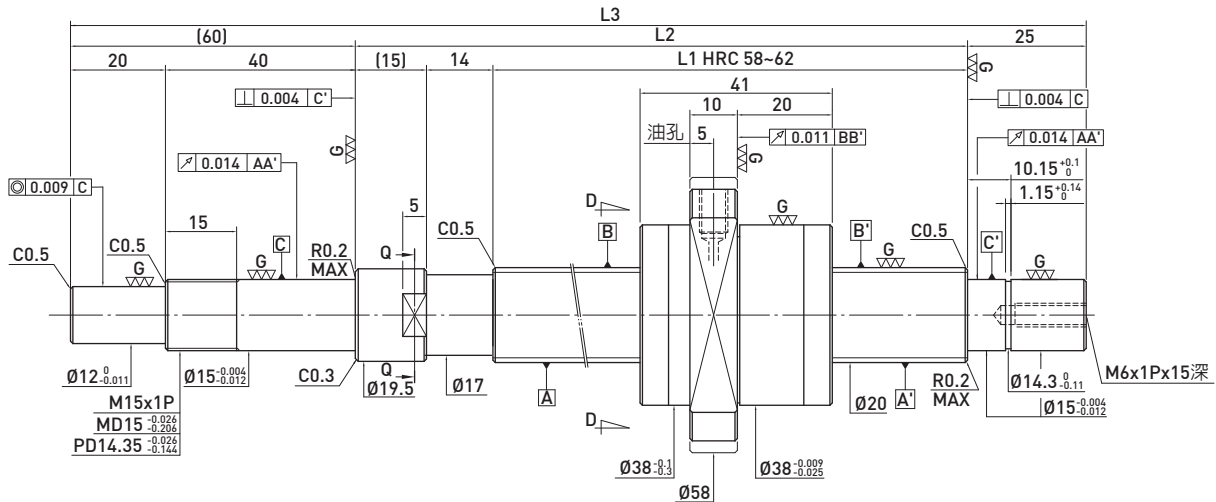

滾珠螺桿資料表	
旋向	右旋
導程(mm)	40
導程角	31.47°
節圓直徑P.C.D(mm)	20.8
珠徑(mm)	Ø3.175
珠卷數	0.7x2
動負荷C(Kgf)	500
靜負荷 Co(Kgf)	987
軸向間隙(mm)	0      0.005 MAX
預壓扭矩(Kgf-cm)	0.2~1.2      0.3 MAX
間隔鋼珠	-

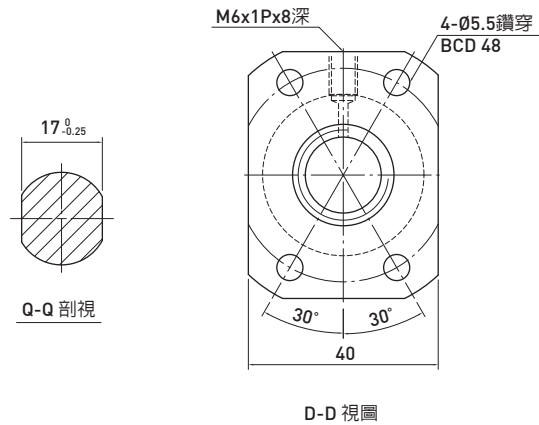

單位：mm

行程	HIWIN 型號	L1	L2	L3	精度等級
400	2R20-40V2-DFSH-506- 620-0.018	506	535	620	5
600	2R20-40V2-DFSH-706- 820-0.018	706	735	820	5
800	2R20-40V2-DFSH-906- 1020-0.018	906	935	1020	5
1000	2R20-40V2-DFSH-1106- 1220-0.018	1106	1135	1220	5
1200	2R20-40V2-DFSH-1306- 1420-0.018	1306	1335	1420	5
1600	2R20-40V2-DFSH-1706- 1820-0.018	1706	1735	1820	5